


XT-VPW Cladwrap 100 – Wall wrap

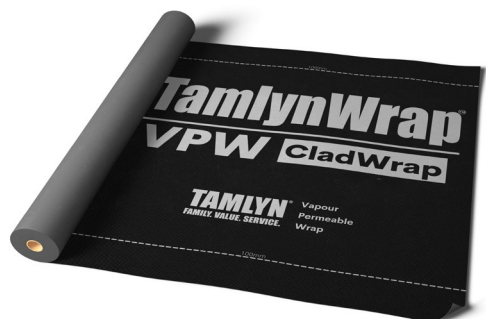

PRODUCT

APPLICATION

Technical specification

Substrate	3 layer spun bonded polypropylene / central microporous film
Dimensions	1.5 x 50m roll
Weight	100g/sm

Performance information

Reaction to Fire (EN 11925-2)	Class E
Water Penetration (EN 1929)	Class W1
Tensile Strength (N/5cm) (EN 12311-1)	Longitudinal 260 Transverse 170
Elongation (%) (EN 12311-1)	Longitudinal 70 Transverse 70
Tear Resistance (N) (EN 12310 -1)	Longitudinal 100 Transverse 120
Water Vapour Resistance EN ISO 12572	0.09 MNs/g/0.02Sd