


XT-Tamlynwrap Xtreme 150 – Breathable underlay

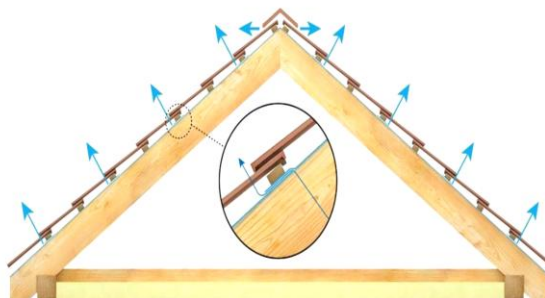

PRODUCT

APPLICATION

Technical specification

Substrate	3 layer spun bonded polypropylene with engineered central breathable film.
Dimensions	1m x 50m roll
Weight	150g/m ² (Roll weight 7.5kg)

Performance information

Water resistance (EN 13111)	6.8 metres (4 x higher than W1)
Tensile Strength (EN 12311-1)	(L) 300N - (T) 250N
UV resistance (exposed)	4 months
Water vapour permeability EN ISO 12572	0.02m (Sd)
Water Vapour Resistance EN ISO 12572	0.1 MNs/g / 1250 gms/ms per 24hrs
UK Zonal compatability	Zones 1-5