


XT-VPW Cladwrap **FR 100** – Wall wrap

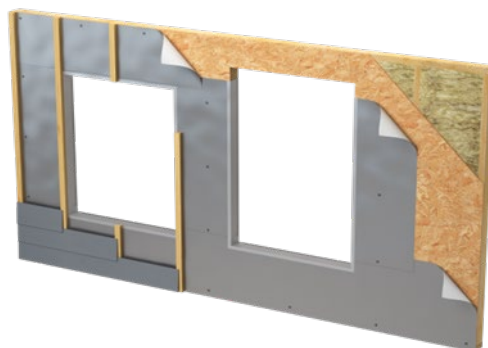

PRODUCT	APPLICATION
---------	-------------

Technical specification

Substrate	Woven glass fibre fabric
Dimensions	1.5 x 50m roll
Weight	210g/m ² (Roll weight 16kg)

Performance information

Reaction to Fire (EN 13501-1)	A1
Water resistance (EN 13111)	W2
Tensile Strength (N/5cm) (EN 12311-1)	(L) 3500N/50mm (T) 1800N/50mm
UV resistance (without cladding)	3 months
Water vapour permeability EN ISO 12572	0.03m (Sd)
Water Vapour Resistance EN ISO 12572	0.15 MNs/g
Temperature flexibility range	-36°C - +150°C